

Industrial Processes and Product Use Sector

Technical Support Unit, IPCC TFI

ipcc

INTERGOVERNMENTAL PANEL ON climate change

Outline

- Overview
- Improvement since 1996 Guidelines
- What gases?
- What sources?
- What features?
- Important for non-Annex I Parties?

Emissions from Industrial Processes

- Emissions from manufacturing processes that chemically or physically transform materials:
e.g.,
 - CO₂ released from calcination of limestone (CaCO₃) in cement production
 - CO₂ generated from use of coke as a reducing agent in production of iron
 - HFC-23 generated as by-product from production of HCFC-22
- Emissions from fuel combustion in industrial activities are NOT included.
 - ➔ Calculated and reported in Energy Sector

Emissions from Product Use

➤ GHGs are used in products and eventually released to the atmosphere:

e.g.,

- HFCs and PFCs: Used as substitutes for ozone depleting substances (e.g., refrigerants)
- SF₆: Used in electrical equipment for electrical insulation and current interruption
- N₂O: Used as anesthesia
- NMVOCs: Used as solvents

Reporting Categories

1996 Guidelines + GPG2000



Sector 2: Industrial Processes

- 2A: Mineral Products
- 2B: Chemical Industry
- 2C: Metal Production
- 2D: Other Production
- 2E: Production of Halocarbons and SF₆
- 2F: Consumption of Halocarbons and SF₆
- 2G: Other

Sector 3: Solvent and Other Product Use

2006 Guidelines



Sector 2: Industrial Processes and Product Use

- 2A: Mineral Industry
- 2B: Chemical Industry
- 2C: Metal Industry
- 2D: Non-Energy Products from Fuels and Solvent Use
- 2E: Electronics Industry
- 2F: Product Uses as Substitutes for ODS
- 2G: Other Product Manufacture and Use
- 2H: Other

Improvement since 1996 Guidelines

- Combined two sectors in the 1996 GLs
- Improved to explicitly include more manufacturing sectors and product uses identified as sources of GHGs, e.g.:
 - Production of lead, zinc, titanium dioxide, petrochemicals, liquid crystal display (LCD), etc.
 - SF₆ and PFCs uses in military applications, accelerators, etc.

Formerly these emissions should have been estimated and reported in “2G Other”, etc.

- New gases, actual emission estimates
 - Explained later.

Improvement since 1996 Guidelines

- Estimation of actual annual emissions instead of “potential emissions”
 - ✓ In the 1996 Guidelines and Good Practice Guidance for a few sources, the simplest methodology estimates a “potential emission” rather than the actual annual emission.
 - *This “potential emission” assumes all the emissions from an activity occur in the current year, ignoring the fact they will occur over many years (e.g. methane emissions from waste in landfills occurs over decades as the decay processes take place).*
 - ✓ In the 2006 Guidelines, simple default methods estimate emissions when they occur, thus removing the need for potential emissions.
 - ✓ The removal of potential emission estimates also allows the emission reductions of abatement techniques to be properly estimated and ensures that the Tier 1 methods are compatible with higher tier methods. The areas where this occurred are:
 - *Actual emissions of fluorinated compounds*
 - *Methane from landfills*

Improvement since 1996 Guidelines

- **Emissions should be reported in the industries where these emissions occur**
 - Particularly relevant with those from use of limestone, dolomite and other carbonates.
(e.g., CO₂ from limestone used as a flux for iron and steel production)
 - Formerly, reported under 2A3 “Limestone and Dolomite Use”.
 - Now, reported under 2C1 “Iron & Steel Production”.
- **CO₂ for later use and short-term storage**
 - Should not be deducted from CO₂ emissions.
 - Exception: urea production,
methanol production

Improvement since 1996 Guidelines

- **Demarcation between Energy and IPPU**
 - Clearer and practical guidance has been given.
- **Non-Energy Uses of Fossil Fuels**
 - Clearer guidance has been introduced on emissions from non-energy uses of fossil fuels (lubricants, paraffin waxes).
 - Emissions from primary use should be reported in IPPU.
 - Emissions from secondary fate should be reported in Energy (in case of combustion for heat/energy), or in Waste (in case of incineration at disposal sites).
 - A method has been introduced for checking the completeness of carbon dioxide emission estimates from the non-energy uses.

Gases

- A wide variety of gases
 - CO_2 , CH_4 , N_2O
 - HFCs, PFCs, SF_6
 - Other halogenated gases
 - Ozone/aerosol precursors (e.g., NMVOCs)
- Under the UNFCCC, non-Annex I Parties:
 - should report CO_2 , CH_4 and N_2O
 - are encouraged to report HFCs, PFCs, SF_6 and precursors
- New gases may emerge in the future.

“New” gases in 2006 Guidelines

– Sources Identified in 2006 Guidelines

By-product & fugitive emissions

| | Electronics Industries | Magnesium production | Halogenated Compounds Production | GWP in TAR | GWP in AR4 |
|--|------------------------|----------------------|----------------------------------|------------|------------|
| nitrogen trifluoride (NF ₃) | ✓ | | ✓ | ✓ | ✓ |
| trifluoromethyl sulphur pentafluoride (SF ₅ CF ₃) | | | ✓ | ✓ | ✓ |
| halogenated ethers (e.g. C ₄ F ₉ OC ₂ H ₅ , CHF ₂ OCF ₂ OC ₂ F ₄ OCHF ₂ , CHF ₂ OCF ₂ OCHF ₂) | ✓ | | ✓ | ✓ | ✓ |
| CF ₃ I, CH ₂ Br ₂ , CHCl ₃ | | | ✓ | ✓ | |
| CH ₂ Cl ₂ , CH ₃ Cl | | | ✓ | ✓ | ✓ |
| C ₃ F ₇ C(O)C ₂ F ₅ | | ✓ | ✓ | | |
| C ₄ F ₆ , C ₅ F ₈ , c-C ₄ F ₈ O | ✓ | | ✓ | | |

“New” gases

➤ “those for which either significant concentrations or large trends in concentrations have been observed or a clear potential for future emissions has been identified.” For example:

– Nitrogen Trifluoride (NF₃)

- Used in manufacture of LCD displays, photovoltaic cells
- Currently 0.04 % of the impact of current human-produced CO₂ emissions
- Current Concentration: 0.454 ppt
- Increasing at 11 % per year
- GWP (100 yr time horizon, 4AR) 17,200

– Trifluoromethyl Sulphur Pentafluoride (SF₅CF₃)

- By-product of fluorinated gas production other sources unknown (related to SF₆)
- Current Concentration: 0.16-0.18 ppt
- Increasing at 6.3 % per year
- GWP (100 yr time horizon, 4AR) 17,700

Sources (For details, see the slides at the end of this file.)

- A wide variety of industries and products
 - Mineral industry
 - cement production, lime production, etc.
 - Chemical industry
 - ammonia production, nitric acid production, petrochemical production, fluorochemical production, etc.
 - Metal industry
 - iron and steel production, aluminium production, magnesium production, etc.
 - Non-energy products from fuels & solvent use
 - Lubricant use, paraffin wax use, solvent use, etc.

Sources (For details, see the slides at the end of this file.)

- A wide variety of industries and products
 - Electronics industry
 - semiconductor manufacturing, TFT flat panel display manufacturing, etc.
 - Product uses as ODS substitutes
 - refrigeration and air conditioning, foam blowing agents, fire protection, etc.
 - Other product manufacture and use
 - electrical equipment, medical applications, propellant for pressure and aerosol products, etc.
- New sources (new industries, new products) may emerge in the future.


Features

- **Diversity of sources and gases**
 - Difficult to exhaustively include all sources & gases
 - Identify and include major sources & gases at least
- **Various opportunities for GHG abatement**
 - Capture and abatement at plants
(e.g., N₂O destruction at nitric acid production plants)
 - Recovery at the end of product's life and subject to either recycled or destroyed
(e.g., HFCs in refrigerators)
- **Care required in treating confidential data obtained from private sectors**

Importance for Non-Annex I Parties


- Tends to be considered less significant as compared to Energy and Agriculture

Breakdown of GHG emissions (CO₂, CH₄ & N₂O, without LUCF) from non-Annex I Parties by sector for 1994

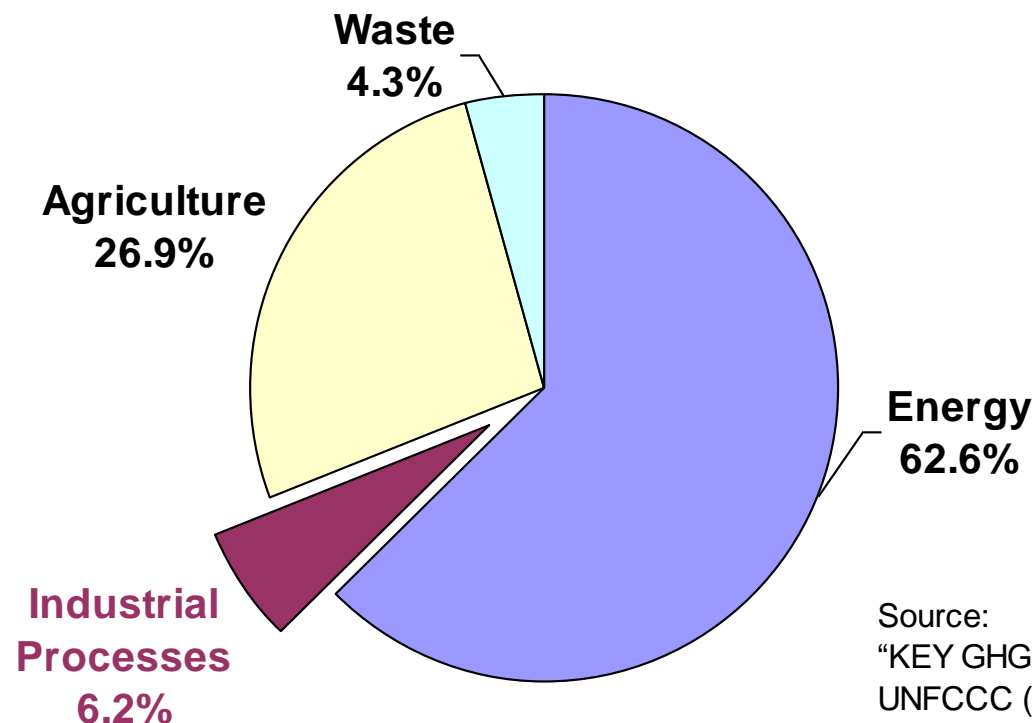

Source:
"KEY GHG DATA" published by
UNFCCC (November 2005)

Sectoral Overview (2000)_SA

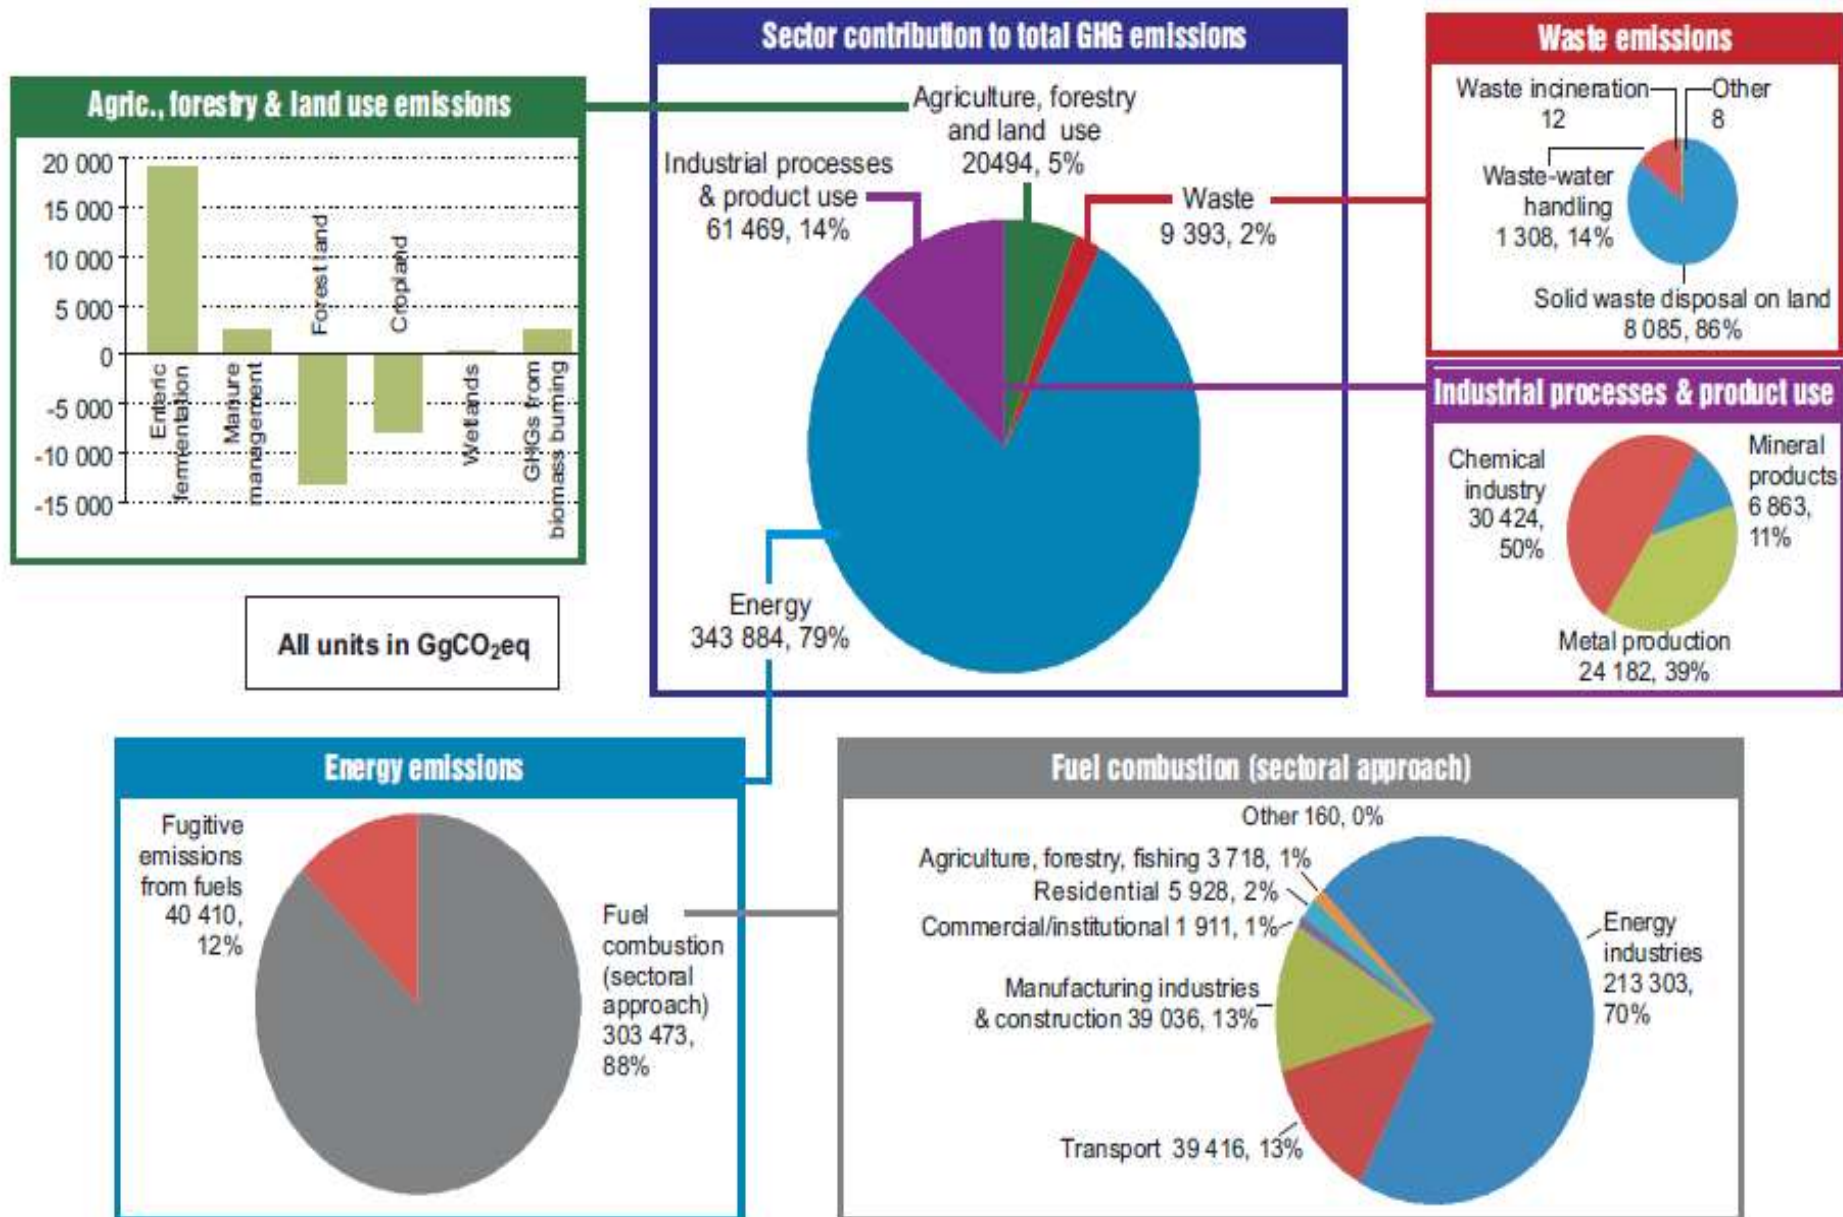

Importance for Non-Annex I Parties

- Situation varies from country to country.
 - e.g., Peru reported 17.2% of GHGs was from Industrial Processes in 1994
- Significance of these sources may become greater in the future as development goes on.
- IP Sector emission estimation is important to find and make use of opportunities for GHG abatement.

How to estimate GHG emissions

- Typical Tier 1 – basic equation & default EF

$$\text{Emission} = \text{AD} \times \text{EF}$$

AD: Activity level data

(e.g., amount of material produced or consumed)

EF: Emission factor

(emission per unit of production or consumption)

- For some sources, a little more complex equation is used. See the IPCC Guidelines.
- Tier 2 (and 3): More detailed methods using:
 - Country-specific or plant-specific EFs
 - Direct measurement emission data
 - Data on GHG abatement / etc.


Chapter 2: Mineral Industry

- Two pathways for CO₂ from carbonates

- Calcination



- Acid-induced release



| Code | Category |
|-------|---------------------------------------|
| 2A1: | Cement Production |
| 2A2: | Lime Production |
| 2A3: | Glass Production |
| 2A4: | Other Process Uses of Carbonates |
| 2A4a: | Ceramics |
| 2A4b: | Other Uses of Soda Ash |
| 2A4c: | Non Metallurgical Magnesia Production |
| 2A4d: | Other |
| 2A5: | Other |

Chapter 2: Mineral Industry

- Consistent approach based on carbonate content of inputs for all sources
- Inclusion of new guidance for other carbonates

TABLE 2.1
FORMULAE, FORMULA WEIGHTS, AND CARBON DIOXIDE CONTENTS OF COMMON CARBONATE SPECIES*

| Carbonate | Mineral Name(s) | Formula Weight | Emission Factor (tonnes CO ₂ /tonne carbonate)** |
|---|------------------------------|-------------------|--|
| CaCO ₃ | Calcite*** or aragonite | 100.0869 | 0.43971 |
| MgCO ₃ | Magnesite | 84.3139 | 0.52197 |
| CaMg(CO ₃) ₂ | Dolomite*** | 184.4008 | 0.47732 |
| FeCO ₃ | Siderite | 115.8539 | 0.37987 |
| Ca(Fe,Mg,Mn)(CO ₃) ₂ | Ankerite**** | 185.0225–215.6160 | 0.40822–0.47572 |
| MnCO ₃ | Rhodochrosite | 114.9470 | 0.38286 |
| Na ₂ CO ₃ | Sodium carbonate or soda ash | 106.0685 | 0.41492 |

Source: CRC Handbook of Chemistry and Physics (2004)

* Final results (i.e., emission estimates) using these data should be rounded to no more than two significant figures.

** The fraction of emitted CO₂ assuming 100 percent calcination; e.g., 1 tonne calcite, if fully calcined, would yield 0.43971 tonnes of CO₂.

*** Calcite is the principal mineral in limestone. Terms like high-magnesium or dolomitic limestones refer to a relatively small substitution of Mg for Ca in the general CaCO₃ formula commonly shown for limestone.

**** Formulae weight range shown for ankerite assumes that Fe, Mg, and Mn are present in amounts of at least 1.0 percent.

Chapter 2: Mineral Industry


- Guidance to report emissions from carbonates where they occur
 - See Table 2.7 in Chapter 2, Vol. 3 to help assure that these emissions are allocated appropriately, and not over-or underestimated.

| TABLE 2.7 EMISSIVE AND NON-EMISSIVE USES OF CARBONATES | | |
|---|---------------------|--|
| Where are Carbonates Consumed? | Is source emissive? | If yes, where should emissions be reported? |
| <i>Agricultural:</i> | | |
| Agricultural limestone | Yes* | AFOLU: 3C2 Liming |
| Poultry grit and mineral food | No | |
| Other agricultural uses | No | |
| <i>Chemical and metallurgical:</i> | | |
| Cement manufacture | Yes | IPPU: 2A1 Cement Production |
| Lime manufacture | Yes | IPPU: 2A2 Lime Production |
| Dead burning of dolomite | Yes | IPPU: 2A2 Lime Production, where deadburned; outside of lime industry under Other (2A4d). |
| Flux stone | Yes | IPPU: 2C Metal Industry, Industry where consumed; unless counted within Energy (for combustible off-gases sold off-site) |
| Chemical stone | Yes** | Source category where consumed |
| Glass manufacture | Yes | IPPU: 2A3 Glass Production |
| Sulphur oxide removal | Yes* | Source category where consumed |
| Fertilisers | Yes** | IPPU: 2B Chemical Industry |
| <i>Ceramics and mineral wool:</i> | | |
| Ceramics | Yes | IPPU: Mineral Industry: 2A4a Ceramics |
| Mineral wools | Yes | IPPU: Mineral Industry: 2A3 Glass Production or 2A4d Other, depending on production process. |
| <i>Special:</i> | | |
| Mine dusting or acid water treatment | Yes* | Source category where consumed |
| Asphalt fillers or extenders | No | |
| Whiting or whiting substitute | No | |

CO₂ from Cement Production

Figure 2.1

Decision tree for estimation of CO₂ emissions from cement production

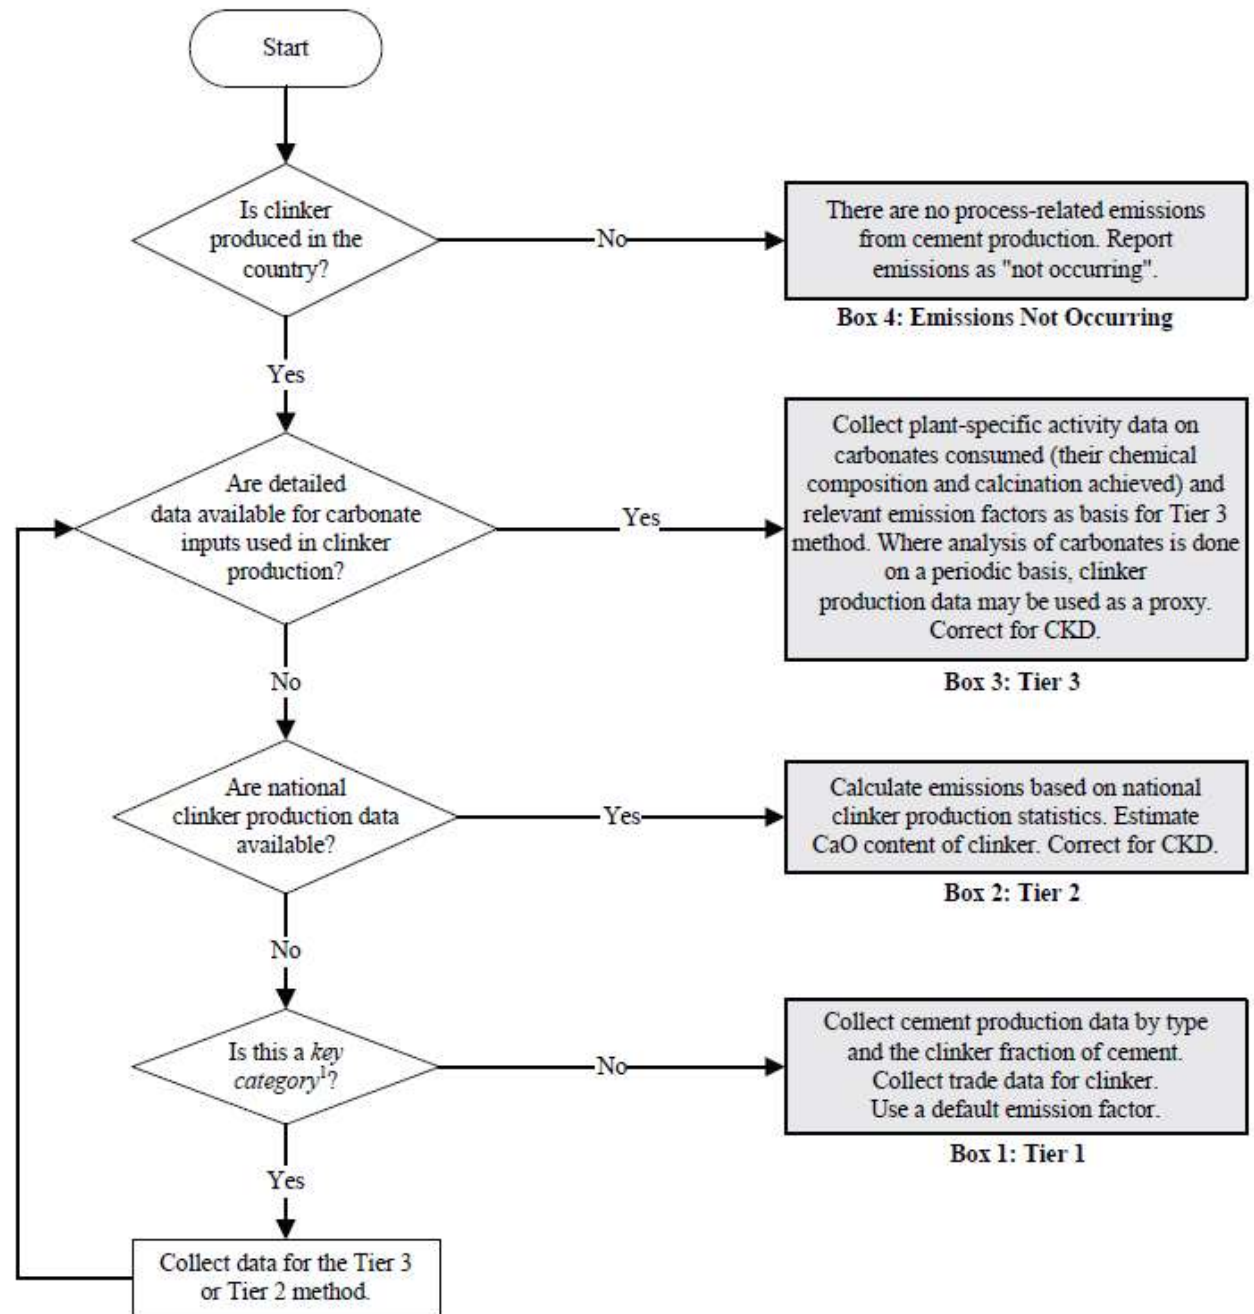

CO₂ from Cement Production (Tier 1)

$$E_{\text{CO}_2} = [\sum(M_{\text{c},i} \times C_{\text{cl},i}) - \text{Im} + \text{Ex}] \times \text{EF}_{\text{clc}}$$

E_{CO_2} = CO₂ emissions from cement production, tonnes

$M_{\text{c},i}$ = mass of cement produced of type i , tonnes

$C_{\text{cl},i}$ = clinker fraction of cement type i , fraction

Im = imports for consumption of clinker, tonnes

Ex = exports of clinker, tonnes

EF_{clc} = emission factor for clinker, tonnes CO₂/tonne clinker

- Default $\text{EF}_{\text{clc}} = 0.52$
 - Already corrected for cement kiln dust (CKD)
- “Activity data” is clinker production
= $[\sum_i(M_{\text{c},i} \times C_{\text{cl},i}) - \text{Im} + \text{Ex}]$

CO₂ from Cement Production (Tier 1)

- To estimate clinker production:
 - National-level data should be collected on:
 - Cement production by type (Portland, masonry, etc.)
 - Clinker fraction by cement type
 - If detailed information on cement type is not available, multiply total cement production by:
 - Default Ccl = 0.75 (if blended/‘masonry’ is much)
 - Default Ccl = 0.95 (if all is essentially ‘Portland’)
 - Data should be obtained on the amount of clinker imported and exported.

CO₂ from Cement Production (Tier 2)

$$E_{\text{CO}_2} = M_{\text{cl}} \times EF_{\text{cl}} \times CF_{\text{ckd}}$$

E_{CO_2} = CO₂ emissions from cement production, tonnes

M_{cl} = mass of clinker produced, tonnes

EF_{cl} = emission factor for clinker, tonnes CO₂/tonne clinker

CF_{cl} = emissions correction factor for CKD, dimensionless

- CKD not recycled to the kiln is considered to be 'lost' and associated emissions are not accounted for by the clinker.

EQUATION 2.5
CORRECTION FACTOR FOR CKD NOT RECYCLED TO THE KILN

$$CF_{\text{ckd}} = 1 + (M_d / M_{\text{cl}}) \cdot C_d \cdot F_d \cdot (EF_c / EF_{\text{cl}})$$

Where:

CF_{ckd} = emissions correction factor for CKD, dimensionless

M_d = weight of CKD not recycled to the kiln, tonnes^a

M_{cl} = weight of clinker produced, tonnes

C_d = fraction of original carbonate in the CKD (i.e., before calcination), fraction^b

F_d = fraction calcination of the original carbonate in the CKD, fraction^b

EF_c = emission factor for the carbonate (Table 2.1), tonnes CO₂/tonne carbonate

EF_{cl} = emission factor for clinker uncorrected for CKD (i.e., 0.51 tonnes CO₂/tonne clinker), tonnes CO₂/tonne clinker

CO₂ from Cement Production (Tier 3)

EQUATION 2.3

TIER 3: EMISSIONS BASED ON CARBONATE RAW MATERIAL INPUTS TO THE KILN

$$CO_2 \text{ Emissions} = \underbrace{\sum_i (EF_i \cdot M_i \cdot F_i)}_{\text{Emissions from carbonates}} - \underbrace{M_d \cdot C_d \cdot (1 - F_d) \cdot EF_d}_{\text{Emissions from uncalcined CKD not recycled to the kiln}} + \underbrace{\sum_k (M_k \cdot X_k \cdot EF_k)}_{\text{Emissions from carbon-bearing non-fuel materials}}$$

Where:

CO₂ Emissions = emissions of CO₂ from cement production, tonnes

EF_i = emission factor for the particular carbonate *i*, tonnes CO₂/tonne carbonate (see Table 2.1)

M_i = weight or mass of carbonate *i* consumed in the kiln, tonnes

F_i = fraction calcination achieved for carbonate *i*, fraction^a

M_d = weight or mass of CKD not recycled to the kiln (= 'lost' CKD), tonnes

C_d = weight fraction of original carbonate in the CKD not recycled to the kiln, fraction^b

F_d = fraction calcination achieved for CKD not recycled to kiln, fraction^a

EF_d = emission factor for the uncalcined carbonate in CKD not recycled to the kiln, tonnes CO₂/tonne carbonate^b

M_k = weight or mass of organic or other carbon-bearing nonfuel raw material *k*, tonnes^c

X_k = fraction of total organic or other carbon in specific nonfuel raw material *k*, fraction^c

EF_k = emission factor for kerogen (or other carbon)-bearing nonfuel raw material *k*, tonnes CO₂/tonne carbonate^c

Chapter 3: Chemical Industry

- Separation of CO₂ from urea use and production
- Various “new” sources added
- Soda Ash Production is included (formerly under 2A)
- Expanded method for HFC-23 and other F-gases by-product

| Code | Category | Code | Category |
|-------|--|-------|--|
| 2B1: | Ammonia Production | 2B8b: | Ethylene |
| 2B2: | Nitric Acid Production | 2B8c: | Ethylene Dichloride and Vinyl Chloride Monomer |
| 2B3: | Adipic Acid Production | 2B8d: | Ethylene Oxide |
| 2B4: | Caprolactam, Glyoxal and Glyoxylic Acid Production | 2B8e: | Acrylonitrile |
| 2B5: | Carbide Production | 2B8f: | Carbon Black |
| 2B6: | Titanium Dioxide Production | 2B9: | Fluorochemical Production |
| 2B7: | Soda Ash Production | 2B9a: | By-product Emissions |
| 2B8: | Petrochemical and Carbon Black Production | 2B9b: | Fugitive Emissions |
| 2B8a: | Methanol | 2B10: | Other |


Chapter 3: Chemical Industry

- CO₂ associated with urea production & use
 - Formerly, all these were implicitly included in CO₂ from Ammonia Production.
 - CO₂ recovered in the ammonia production process for urea production should be deducted from CO₂ emissions from 2B1 Ammonia Production.
 - CO₂ emissions from urea use/incineration should be reported in the category where they occur: e.g.,
 - Use of urea-based catalysts (Energy Sector)
 - Urea application to agricultural soils (AFOLU Sector)
 - Incineration of urea-based products (Waste Sector)
 - Thus, now, proper account can be taken for exports of urea produced in ammonia plants.

Emissions from petrochemical and carbon black production

e.g., methanol production


Figure 3.11 Methanol production feedstock-product flow diagram

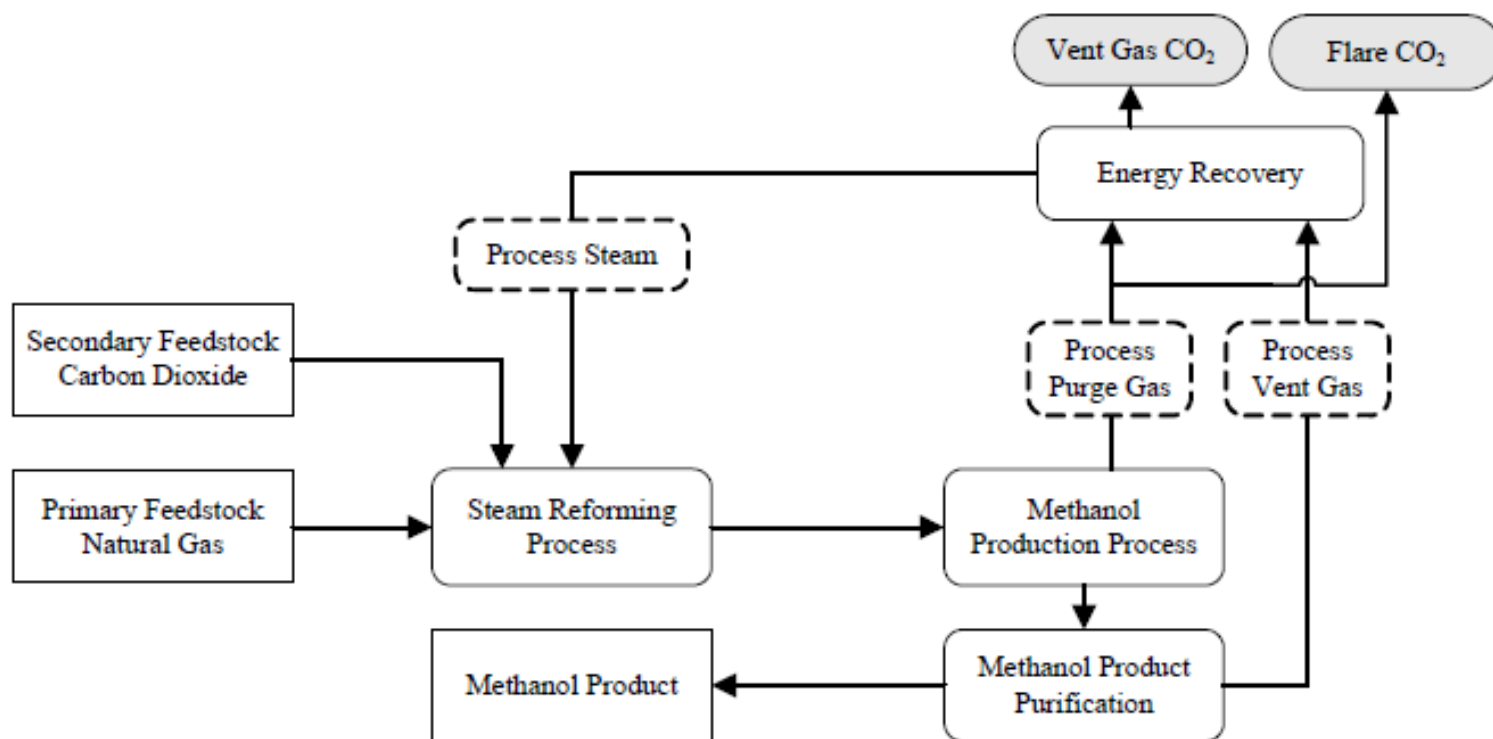

Emissions from petrochemical and carbon black production

e.g., carbon black production


Figure 3.15 Carbon black production feedstock-product flow diagram

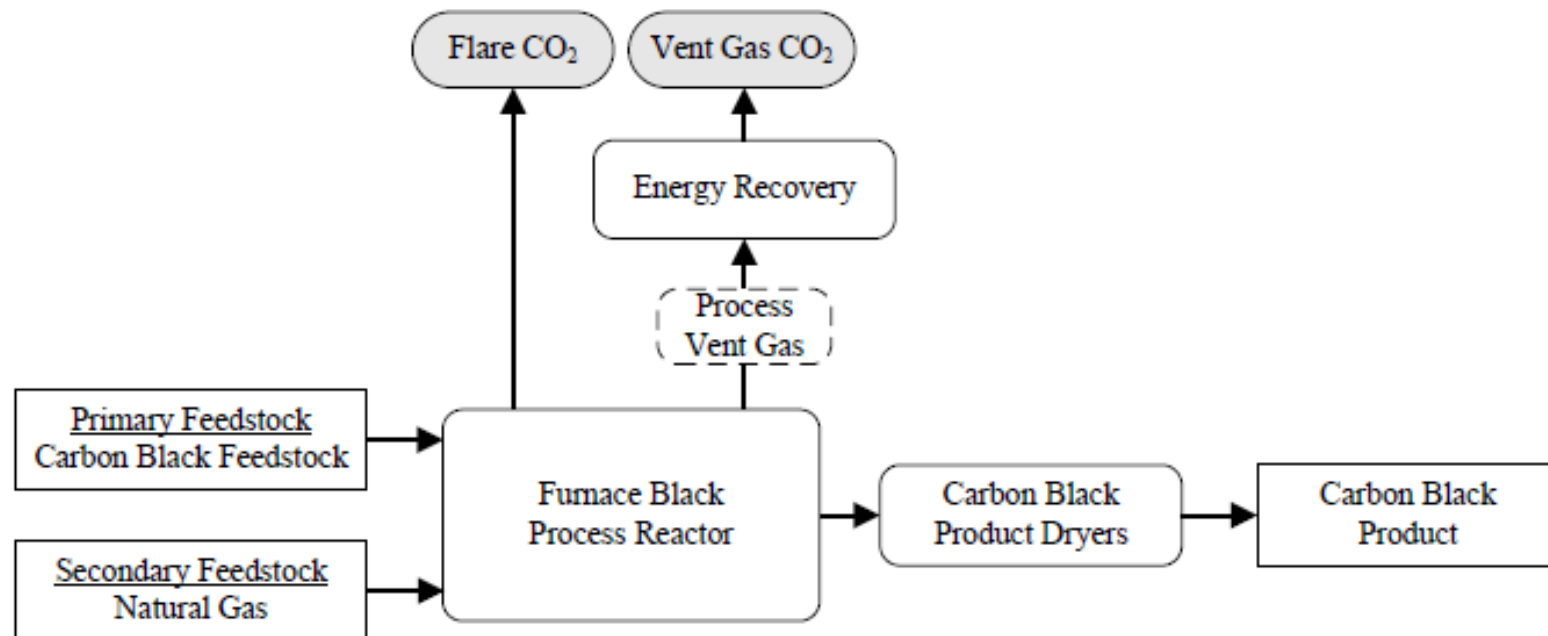

Emissions from petrochemical and carbon black production

e.g., carbon black production

Figure 3.15 Carbon black production feedstock-product flow diagram

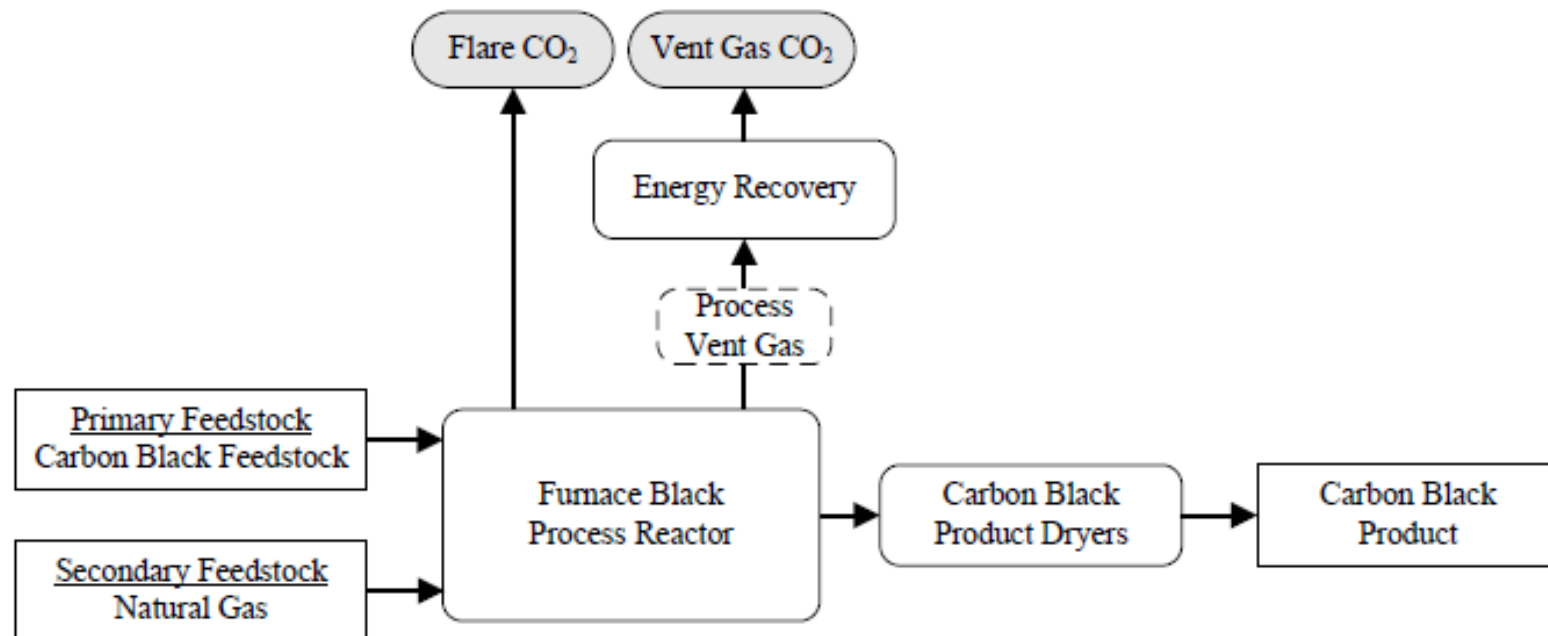


Chapter 4: Metal Industry

- Detailed treatment of different production routes for iron and steel including DRI and metallurgical coke (Emissions from metallurgical coke should be reported under Energy Sector.)
- Improved guidance on production of ferroalloys
- New guidance on zinc and lead production

| Code | Category |
|------|---------------------------|
| 2C1: | Iron and Steel Production |
| 2C2: | Ferroalloys Production |
| 2C3: | Aluminium Production |
| 2C4: | Magnesium Production |
| 2C5: | Lead Production |
| 2C6: | Zinc Production |
| 2C7: | Other |

CO₂ from Iron & Steel Production


Figure 4.1 Illustration of main processes for integrated iron and steel production*

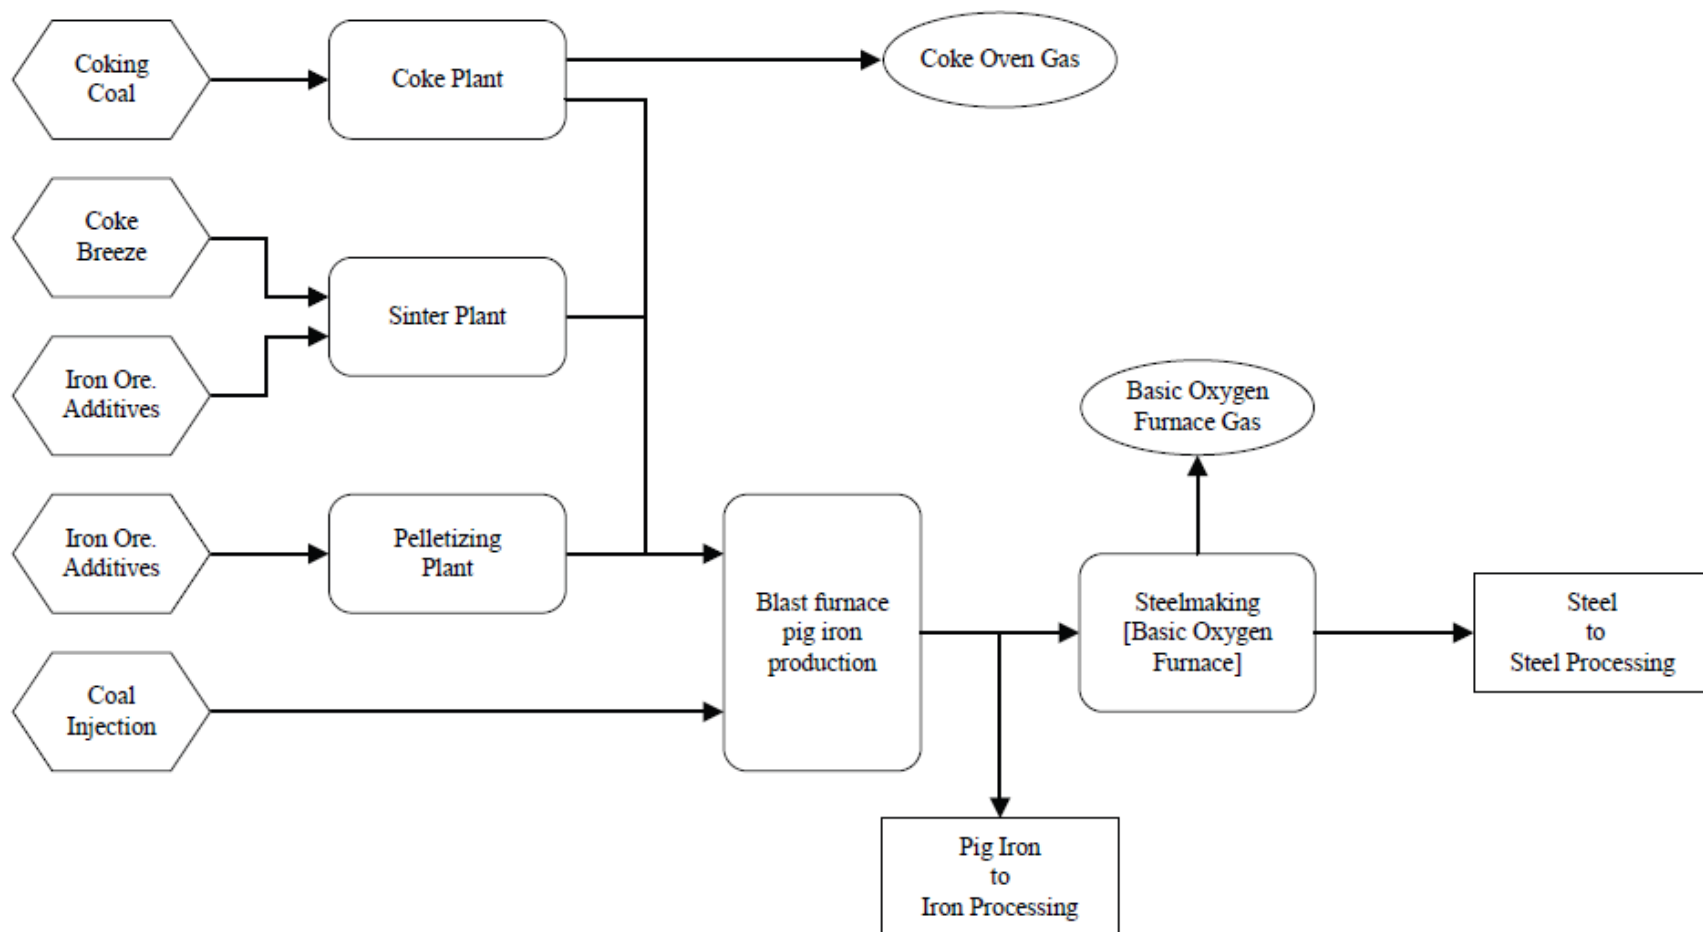

* Modified from: European Conference on "The Sevilla Process: A Driver for Environmental Performance in Industry" Stuttgart, 6 and 7 April 2000, BREF on the Production of Iron and Steel - conclusion on BAT, Dr. Harald Schoenberger, Regional State Governmental Office Freiburg, April 2000. (Schoenberger, 2000)

CO₂ from Iron & Steel Production

Figure 4.2 Illustration of coke production process (emissions reported in Category 1A of the Energy Sector)

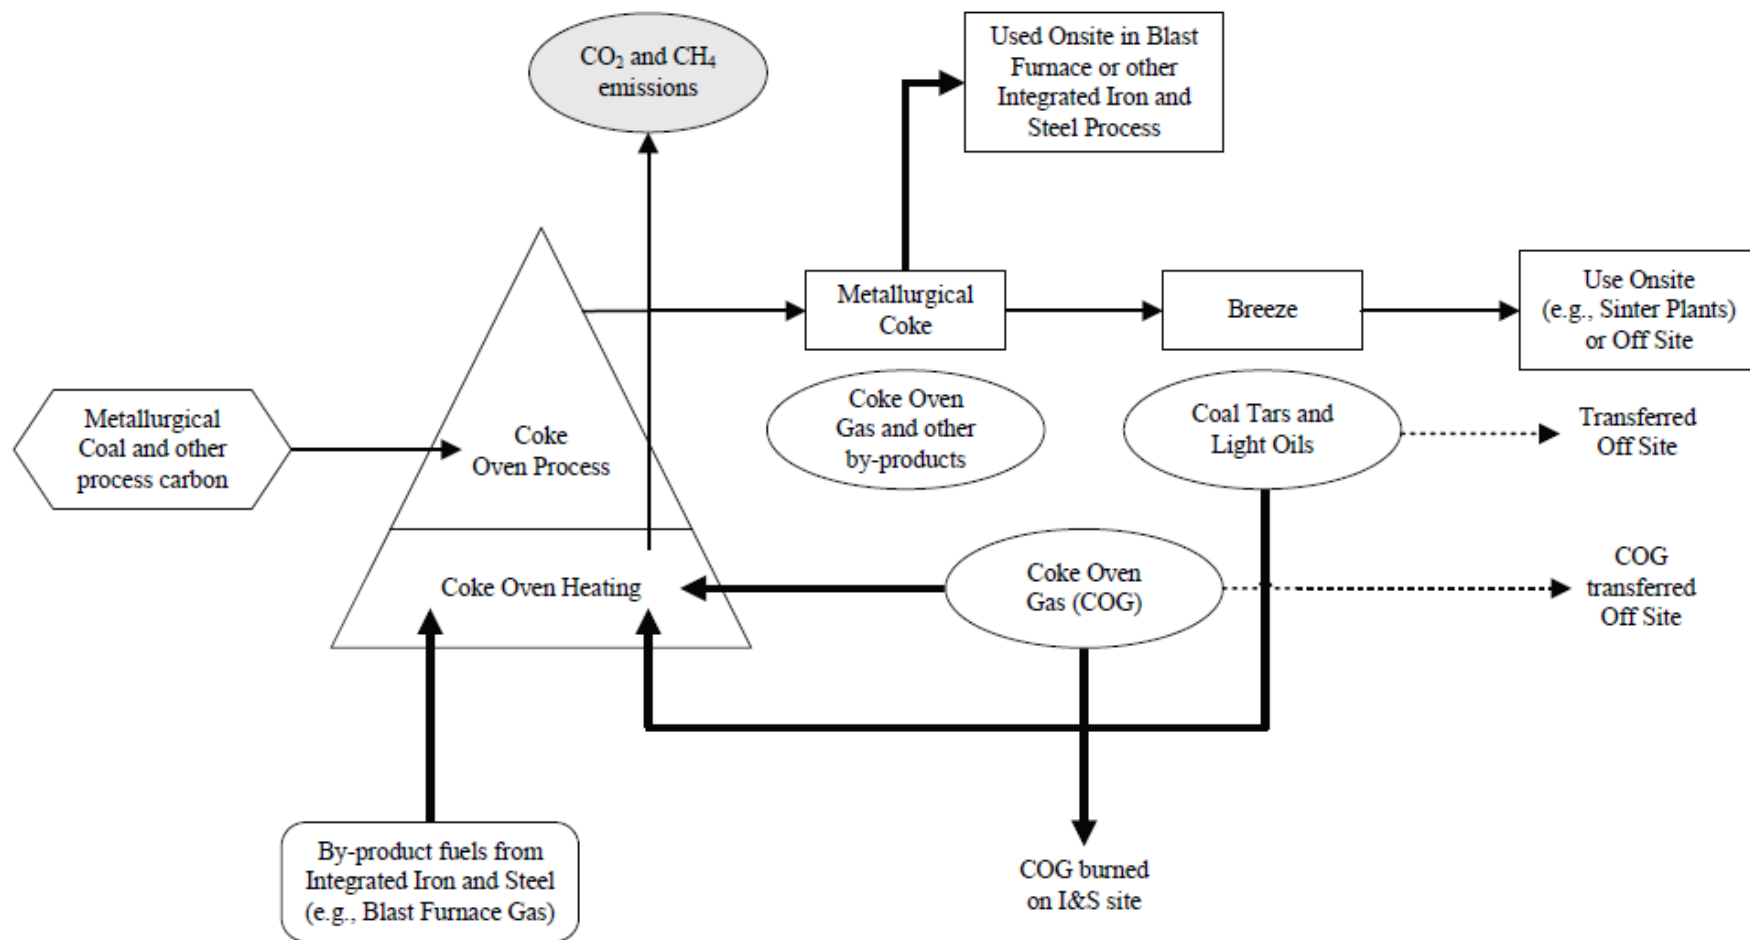


Note:

Bold lines apply only to Onsite Coke Production at Integrated Iron and Steel Mill. Dashed lines apply to transfers of materials to 'Off Site processes.' 'Off Site process' does not include Integrated Iron and Steel production processes, which are categorised as Onsite.

CO₂ from Iron & Steel Production

Figure 4.7 Decision tree for estimation of CO₂ emissions from iron and steel production

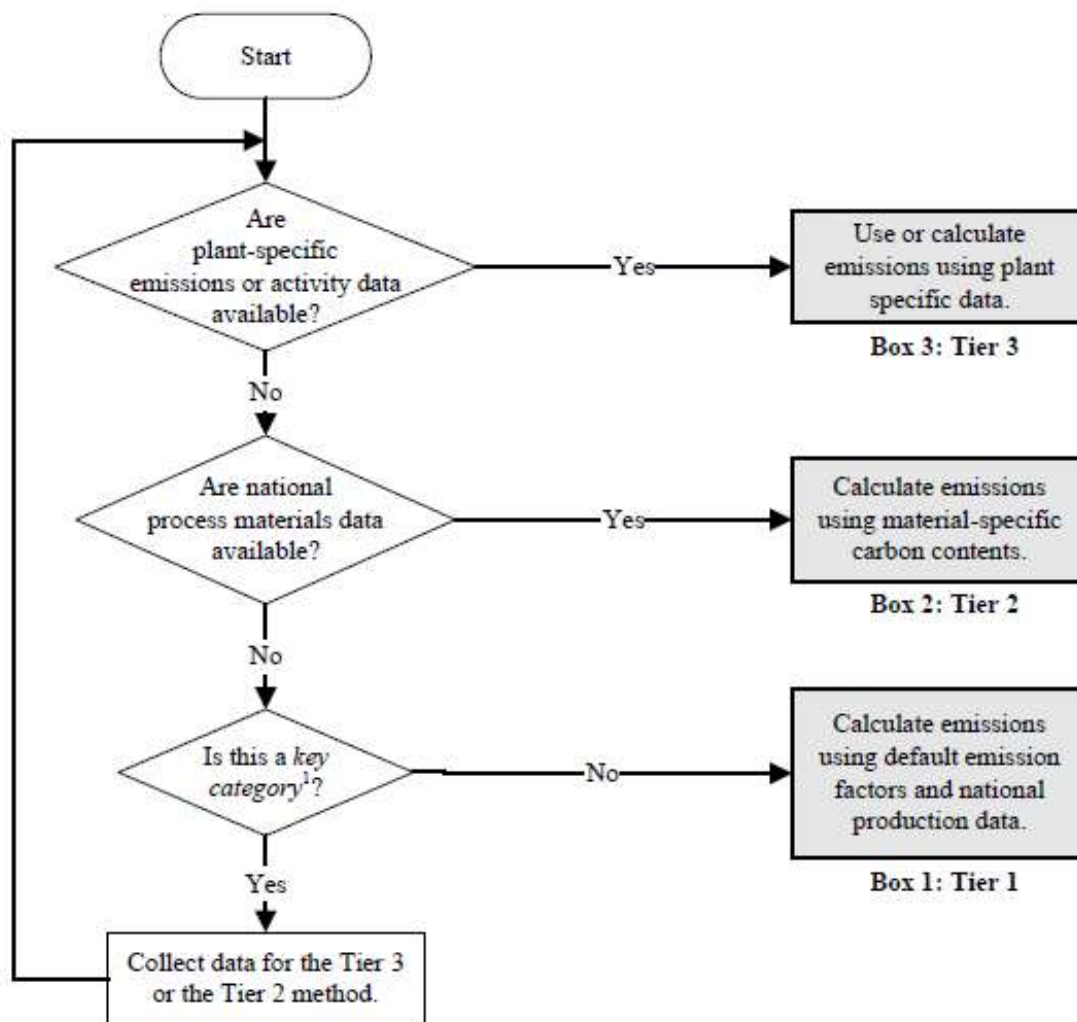

Note:

1. See Volume 1 Chapter 4, Methodological Choice and Identification of Key Categories (noting Section 4.1.2 on limited resources), for discussion of *key categories* and use of decision trees.

CO₂ from Iron and Steel Production (Tier 1)

$$E_{\text{CO}_2} = \sum_i (AD_i \times EF_i)$$

E_{CO_2} = CO₂ emissions from iron & steel production, tonnes

AD_i = quantity of material i , tonnes

EF_i = emission factor for production of material i ,
tonnes CO₂/tonne material i produced

Material i to be included:

- Crude steel from Basic Oxygen Furnace (BOF)
- Crude steel from Electric Arc Oxygen Furnace (EAF)
- Crude steel from Open Hearth Furnace (OHF)
- Pig iron not converted to steel
- Direct reduced iron (DRI)
- Sinter
- Pellet

CO₂ from Iron and Steel Production (Tier 1)

➤ Emissions from metallurgical coke production should be reported in Energy Sector.

➤ Default EFs are:

- BOF steel: 1.46 t-CO₂/t
- EAF steel: 0.08 t-CO₂/t
- OHF steel: 1.72 t-CO₂/t
- Pig iron: 1.35 t-CO₂/t
- DRI: 0.70 t-CO₂/t
- Sinter: 0.20 t-CO₂/t
- Pellet: 0.03 t-CO₂/t

Global average default
= 1.06 t-CO₂/t

(If activity data on steel production for each process is not available, multiply total steel production by this EF.)

CO₂ from Iron and Steel Production (Tier 2)

EQUATION 4.9

CO₂ EMISSIONS FROM IRON & STEEL PRODUCTION (TIER 2)

$$E_{CO2, non-energy} = \left[PC \cdot C_{PC} + \sum_a (COB_a \cdot C_a) + CI \cdot C_{CI} + L \cdot C_L + D \cdot C_D + CE \cdot C_{CE} + \sum_b (O_b \cdot C_b) + COG \cdot C_{COG} - S \cdot C_S - IP \cdot C_{IP} - BG \cdot C_{BG} \right] \cdot \frac{44}{12}$$

Where, for iron and steel production:

$E_{CO2, non-energy}$ = emissions of CO₂ to be reported in IPPU Sector, tonnes

PC = quantity of coke consumed in iron and steel production (not including sinter production), tonnes

COB_a = quantity of onsite coke oven by-product *a*, consumed in blast furnace, tonnes

CI = quantity of coal directly injected into blast furnace, tonnes

L = quantity of limestone consumed in iron and steel production, tonnes

D = quantity of dolomite consumed in iron and steel production, tonnes

CE = quantity of carbon electrodes consumed in EAFs, tonnes

O_b = quantity of other carbonaceous and process material *b*, consumed in iron and steel production, such as sinter or waste plastic, tonnes

COG = quantity of coke oven gas consumed in blast furnace in iron and steel production, m³ (or other unit such as tonnes or GJ. Conversion of the unit should be consistent with Volume 2: Energy)

S = quantity of steel produced, tonnes

IP = quantity of iron production not converted to steel, tonnes

BG = quantity of blast furnace gas transferred offsite, m³ (or other unit such as tonnes or GJ. Conversion of the unit should be consistent with Volume 2: Energy)

C_x = carbon content of material input or output *x*, tonnes C/(unit for material *x*) [e.g., tonnes C/tonne]

Chapter 5: Non-Energy Products from Fuels and Solvent Use

- Inclusion of previously separate sector on solvent use
- Consideration of use of fuels as lubricants, paraffin waxes, bitumen/asphalt and solvents
- Focuses on direct CO₂ emissions

| Code | Category |
|------|------------------|
| 2D1: | Lubricant Use |
| 2D2: | Paraffin Wax Use |
| 2D3: | Solvent Use |
| 2D4: | Other |

Chapter 6: Electronics Industry

- Added guidance on production of PV cells, LCD and heat transfer fluids
- Inclusion of new gases applied in the industry
- Update of emission factors – including treatment of abatement
- Inclusion of a new tier 1 method providing emission factors & activity data

| Code | Category |
|------|-------------------------------------|
| 2E1: | Integrated Circuit or Semiconductor |
| 2E2: | TFT Flat Panel Display |
| 2E3: | Photovoltaics |
| 2E4: | Heat Transfer Fluid |
| 2E5: | Other |

Chapter 7: Fluorinated Substitutes for ODS

- Tier 1 approach on “actual emissions” instead of “potential emissions”

| Code | Category |
|-------|---|
| 2F1: | Refrigeration and Air Conditioning |
| 2F1a: | Refrigeration and Stationary Air Conditioning |
| 2F1b: | Air Conditioning |
| 2F2: | Foam Blowing Agents |
| 2F3: | Fire Protection |
| 2F4: | Aerosols |
| 2F5: | Solvents |
| 2F6: | Other Applications |

Emissions of Fluorinated Substitutes for Ozone Depleting Substance (Refrigeration)


➤ Sector includes

- Commercial and Domestic Refrigeration
- Commercial and Domestic Air Conditioning
- Industrial Processes (chillers, cold storage, heat pumps etc.)
- Vehicular Air Conditioning (cars, buses, trains)

➤ Emissions occur from:

- Leakage from equipment in use
- Retirement – scrapping of old equipment

“Banks”

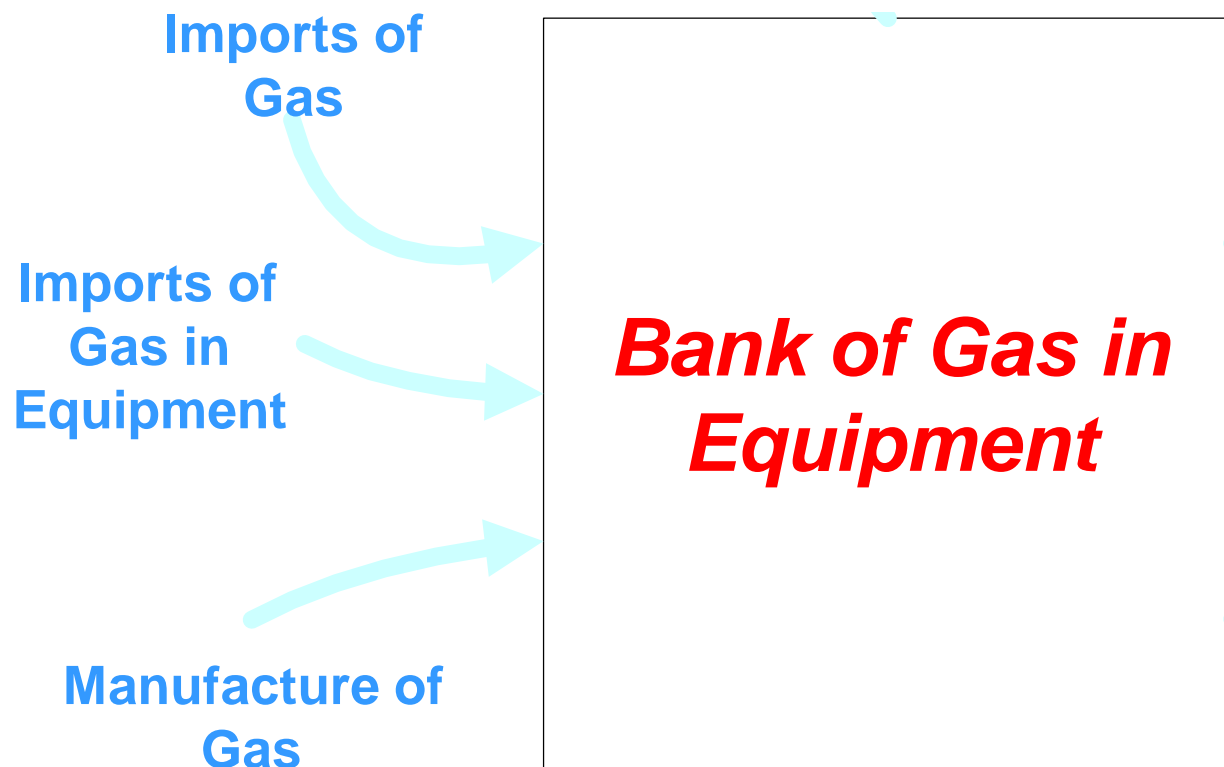

Defaults

➤ Leakage:

- 15% of banked emissions
- Servicing after 3 years old

➤ End of Life

- Equipment lifetime is 15 years after which remaining gas is released UNLESS recovery and reuse/destruction documented

➤ Therefore emissions depend on sales in previous years – simple default approach possible

Tier 1 Refrigeration

Argentina - HFC-143a

HFC-143a

Current Year

2005

Use in current year - 2005 (tonnes)

Data
Used
Here

Production of HFC-143a 800

Imports in current Year 200

Exports in current year 0

Total new agent to domestic market 1000

Year of Introduction of HFC-143a 1998

Growth Rate in New Equipment Sales 3.0%

Tier 1 Defaults

Assumed Equipment Lifetime (years) 15

Emission Factor from installed base 15%

% of HFC-143a destroyed at End-of-Life 0%

| Estimated data for earlier years | 1996 | 1997 | 1998 |
|--|------|------|------|
| Production | 0 | 0 | 81 |
| Agent in Exports | 0 | 0 | 0 |
| Agent in Imports | 0 | 0 | 20 |
| Total New Agent in Domestic Equipment | 0 | 0 | 102 |
| Agent in Retired Equipment | 0 | 0 | 0 |
| Destruction of agent in retired equipment | 0 | 0 | 0 |
| Release of agent from retired equipment | 0 | 0 | 0 |
| Bank | 0 | 0 | 102 |
| Emission | 0 | 0 | 15 |

Summary


Country: Argentina

Agent: HFC-143a

Year: 2005

Emission: 460.7 tonnes

In Bank: 3071.1 tonnes

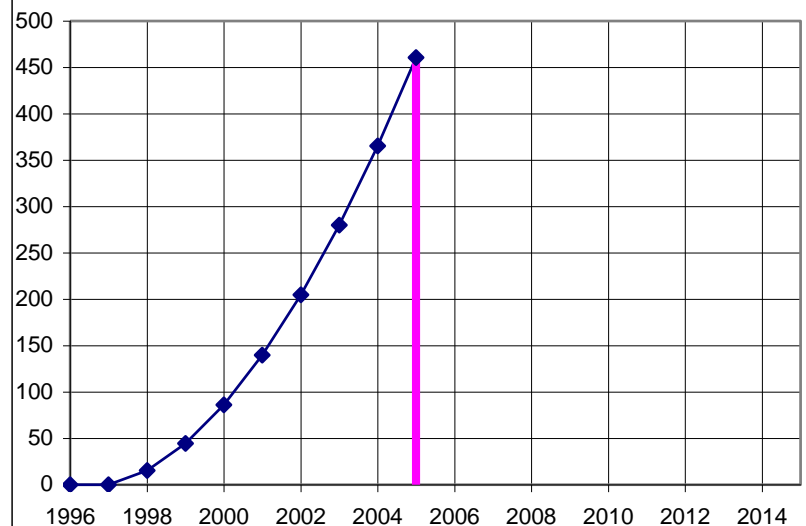

Chapter 8: Other Product Manufacture and Use

- SF₆ (and PFCs) from electrical equipment:
 - Replacement of three parallel Tier 3 mass balance methods by one flexible method
 - New tier 1 emission factors for regions and technologies
- Other sources: e.g. nuclear fuel cycle, military applications

| Code | Category | Code | Category |
|-------|--|-------|--|
| 2G1: | Electrical Equipment | 2G2c: | Other |
| 2G1a: | Manufacture | 2G3: | N ₂ O from Product Uses |
| 2G1b: | Use | 2G3a: | Medical Applications |
| 2G1c: | Disposal | 2G3b: | Propellant for Pressure and Aerosol Products |
| 2G2: | SF ₆ and PFCs from Other Product Uses | 2G3c: | Other |
| 2G2a: | Military Applications | 2G4: | Other |
| 2G2b: | Accelerators | | |

Any questions?

Please note:

All images in this presentation file © IPCC 2007 unless otherwise noted.